



2CH with encoder




TYPICAL APPLICATIONS	Electronic and electrical function selector
WIRING DIAGRAMS	■ On demand
CYCLE No.	30.000
AMBIENT TEMPERATURE	85 °C
ADDITIONAL FEATURES	■ Solution combining selector and encoder functions, that allows to improve flexibility and compactness

Solution combining selector and encoder functions, that allows to improve flexibility and compactness.

RATING

16 (6) A / 250 VAC - 3E4
 16 (8) A / 250 VAC
 18 A / 250 VAC - 3E4
 12 A / 400 VAC - 3E4
 T85 °C
 According to EN 61058-1

18 A GP / 250 VAC
 16 (8) A / 250 VAC
 According to UL 61058-1

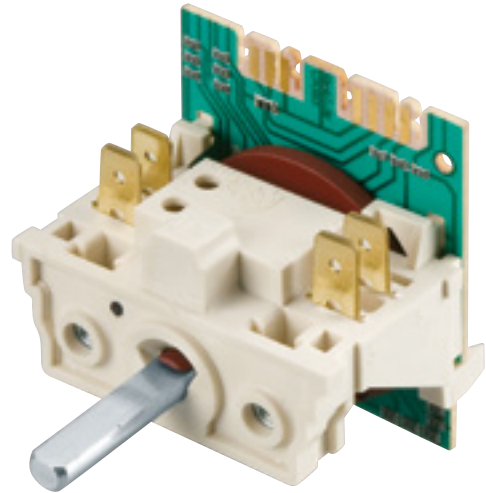

DIMENSIONS

