

CP




<b>TYPICAL APPLICATIONS</b>	Hairdryers
<b>FUNCTIONS</b>	■ SPDT (3 positions 0/1/1+2)
<b>CYCLE No.</b>	50.000
<b>CUT OUT</b>	See drawing
<b>AMBIENT TEMPERATURE</b>	85 °C
<b>GWT</b>	850 °C




DRAWING




TERMINAL

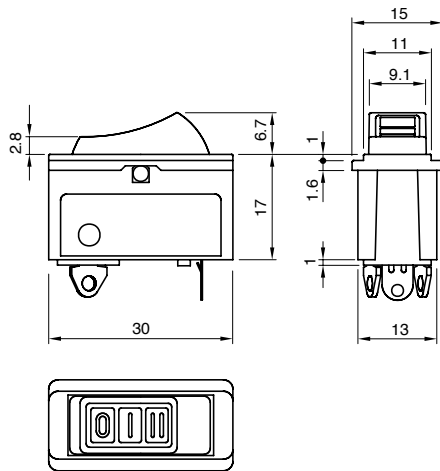

C



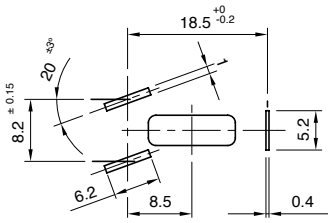

C
P






0
0
0
0

TERMINAL    FUNCTION    RATING    BODY COLOUR    ROCKER COLOUR



**FUNCTION**

**1**



**RATING**

**2**

16 A / 250 VAC  
 10 A / 250 VAC - 5E4  
 T85 °C  
 µ disconnection  
 EN 61058

**3**

16 A / 250 VAC  
 10 A / 250 VAC - 5E4  
 T85 °C  
 µ disconnection  
 EN 61058

13 A / 125 VAC  
 6.5 A / 250 VAC  
 T65 °C  
 UL 1054



**BODY COLOUR**

**1**  

black

**2**  

white

**X** ?

custom



**ROCKER COLOUR**

**1**  

black

**2**  

white

**9**  

red

**X** ?

custom