



T5




Reported to internal components series TOUCH



TYPICAL APPLICATIONS	Cooker hoods, coffee machines, microwave ovens
FUNCTIONS	Switch Keyboard <ul style="list-style-type: none"> ■ SPST, momentary or not ■ SPDT, momentary or not ■ DPST, momentary or not ■ DPDT, momentary or not
CYCLE No.	10.000
CUT OUT	-
AMBIENT TEMPERATURE	85 °C
GWT	850 °C
GWT NO FLAME (<2 sec)	750 °C




DRAWING

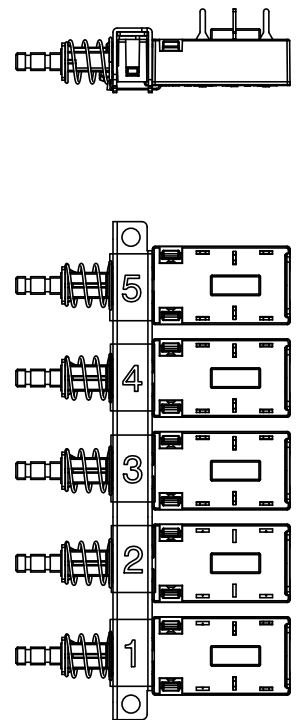


PITCH BETWEEN SWITCHES


A Pitch 17.5 mm

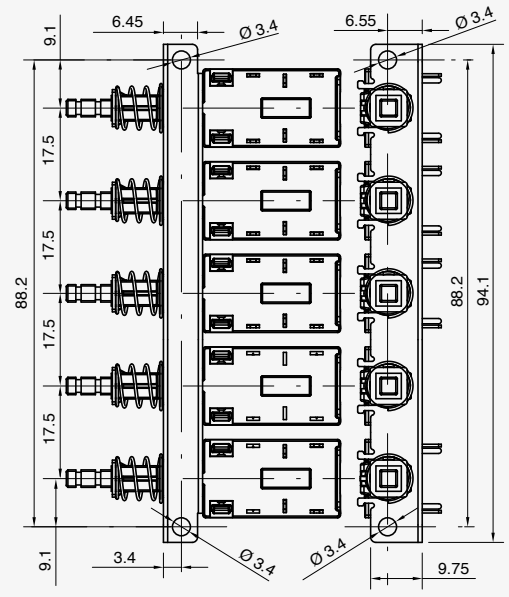

B Pitch 20 mm

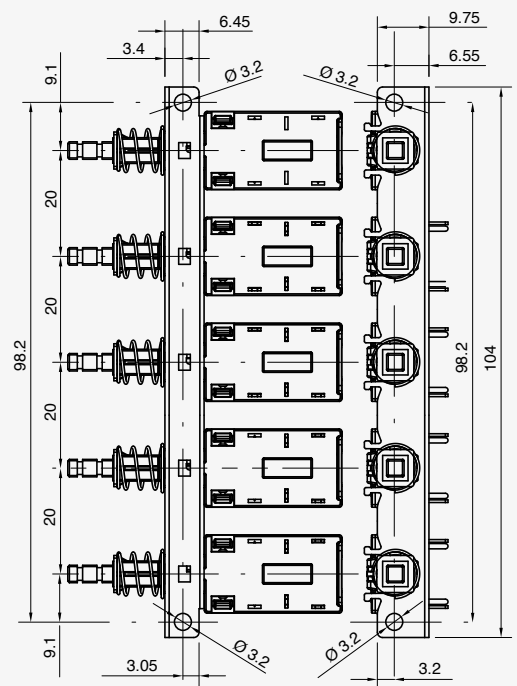

Drilling cut out for PCB



T **5** **0** **0** **0** **W**

PITCH BETWEEN SWITCHES FIXING TYPE AND TERMINALS ACTUATOR TYPE FUNCTION SWITCH 1 FUNCTION SWITCH 2 FUNCTION SWITCH 3 FUNCTION SWITCH 4 FUNCTION SWITCH 5 RATING

	FIXING TYPE AND TERMINALS	ACTUATOR TYPE	FUNCTION SWITCH 1	FUNCTION SWITCH 2	FUNCTION SWITCH 3	FUNCTION SWITCH 4	FUNCTION SWITCH 5	RATING
14								
A			1	2	3	4	7	B
			3	4	7	B	L	M
			4	7	B	L	M	Z
			7	B	L	M	Z	
			B	L	M	Z		
			L	M	Z			
			M	Z				
			Z					
			Reset	Reset	Reset	Reset	Reset	

2
5 (2) A / 250 VAC
T85 °C
6 A GP / 125 VAC
5 (2) A / 250 VAC
T85 °C

3
8 (3) A / 250 VAC
T85 °C
6 A GP / 125 VAC
5 (2) A / 250 VAC
T85 °C