



TOUCH



TYPICAL APPLICATIONS	Cooker hoods, coffee machines, microwave
FUNCTIONS	<ul style="list-style-type: none"> ■ SPST, momentary or not ■ SPDT, momentary or not ■ DPST, momentary or not ■ DPDT, momentary or not
CYCLE No.	10.000
CUT OUT	-
AMBIENT TEMPERATURE	85 °C
GWT	850 °C
GWT NO FLAME (<2 sec)	750 °C



T O U C H


DRAWING



TERMINAL

4

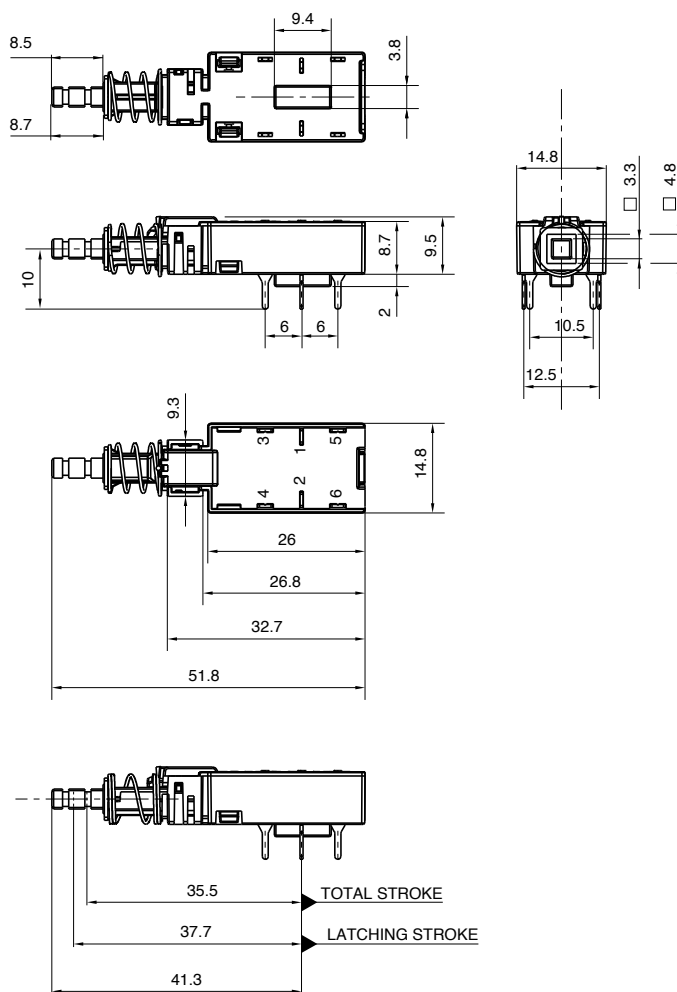



T O U C H **O O W**

TERMINAL SHAFT FUNCTION RATING



SHAFT




FUNCTION




RATING

A



B



1



2



3




4




7




B



L



M



2

5 (2) A / 250 VAC
T85 °C
EN 61058-1

6 A GP / 125 VAC
 5 (2) A / 250 VAC
 T85 °C
 UL 61058-1

3

8 (3) A / 250 VAC
T85 °C
EN 61058-1

6 A GP / 125 VAC
 5 (2) A / 250 VAC
 T85 °C
 UL 61058-1